

Vitarte M6 Homelift

Active safety single-screw elevator

1-Minute Active Self-Rescue

Equipped with a built-in, concealed mechanical self-rescue device, passengers can operate independently to escape in the event of elevator control system failures, electrical failures, or mechanical failures, without waiting for rescue by others, making it safer!

Installs in Just 1m2

A home elevator can be installed in the space of a single person's wardrobe, meeting the daily needs of the family for upstairs and downstairs use. It requires no excavation for a pit, no machine room, and offers flexible installation locations.

Safe and Comfortable

- ARD Power Failure Rescue System
- BASS Battery Monitoring System
- FER Fire Emergency Stopping
- OLP Overload Protection Safety Device
- Silent Door Anti-Pinch Function
- Platform Safety Frame
- One-Button Emergency Call...

Beautify It to Your Liking

To better blend with your home decor, on top of the simple and elegant frame, you can customize the elevator's color, background wall, ceiling, carpet, handrail, internal control panel, and external call button.



Vitarte
维亚帝

Lonchuang Smart Home (Jiaxing) Co., Ltd.

Service Hotline: 4007-888-521

Official Website: www.lonchuang.com

Lifting height : $\leq 12000\text{mm}$

Rated voltage: 220V

Overhead height: $\geq 2300\text{mm}$

Customized number of stops : 6 floors

Elevator Colors:



Matt grey



Porcelain White




Amber gold

Background

Standard Configuration

Optional Configurations


Wall:

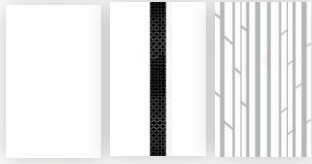

Pure White

Artistic Brocade

Bamboo Shadow Design

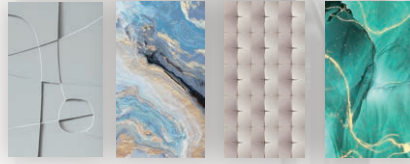

Geometric Elegance

Glinting Golden Years

Wind-Whispering Plain Paper

Radiant Golden Jade

Hall call:

Standard Configuration

Optional Configurations



Starry sky



Water droplet



Milky Way

Control panel:

Standard Configuration

Optional Configurations




10.1-inch touchscreen



15.6-inch touchscreen

Flooring:



Glass:

Standard Configuration: Ultra-Clear High-Transparency Glass
Optional Configurations: Grey Crystal Glass, Blue Glass

Observation Shaft:

Aluminum Alloy Frame, 5+5 Tempered Laminated Glass

Operating Speed:

Standard Configuration: 0.15m/s
Optional Configuration: 0.2m/s

Pit depth:

$\geq 80\text{mm}$

Door Opening Method:

Automatic Double-Hinged Doors

Model	Platform size(mm)	Elevator dimensions(mm)	Reserved dimensions(mm)	Rated load capacity
L0	864×582	914×962	964×1012	180kg/2pers
L1	914×862	964×1242	1014×1292	180kg/2pers
L2	1144×892	1194×1272	1244×1322	250kg/3pers
L3	1314×892	1364×1272	1414×1322	250kg/3pers
L4	1414×892	1464×1272	1514×1322	250kg/3pers
L5	1314×1212	1364×1592	1414×1642	300kg/4pers
L6	1414×1412	1464×1792	1514×1842	400kg/5pers

